

DIRIS[®] A

The multi-function measurement **range**
FOR **MANAGING** YOUR ELECTRICAL NETWORKS

MADE TO MEASURE



socomec
Innovative Power Solutions **SCP**


A comprehensive range for measuring your energy efficiency



GAMME 115 A GB

The new **DIRIS & COUNTIS** solutions are tailored to the requirements of industrial or tertiary environments: energy metering, quality monitoring and analysis of electrical networks.

Compliant with the new standard IEC 61557-12 specifically for multi-measurement devices (PMD), they guarantee the operator use of a product designed and tested in accordance with the functional requirements of its application, ensuring a high performance level.

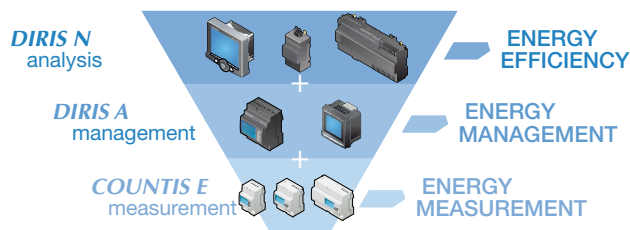

DIRIS 762 B GB

The **DIRIS**® system: the reference

Measurement is the key link in managing an energy efficiency project.

With **DIRIS**, SOCOMEC has developed the most advanced multifunction measurement range on the market, dedicated to improving your energy performance.

For over 20 years, thousands of users, installers or integrators have trusted **DIRIS** innovative solutions for:

- energy metering and management
- electrical facility monitoring
- power quality analysis.

Follow the leader and run with the pioneers, by opting for the **DIRIS** solution.

DIRIS A: compliant with IEC 61557-12

DIRIS A conforms to this new standard, which has been specifically created to govern Performance Measuring and monitoring Devices (PMD). IEC 61557-12 guarantees the user that the product meets all the metrological, mechanical and environmental requirements of an electrical distribution network (EMC, temperature, etc.).

For further information: www.socomec.com

Customised upgradability

Thanks to the optional plug-in modules the product features can be upgraded at any time. **DIRIS A** has optimum adaptability to the requirements of multi-measurement applications.

SOCOMECS is once again expanding the field of application of the **DIRIS A** with the addition of modules for:


- Ethernet communication
- Temperature measurement & monitoring.



DIRIS 767 A

Ethernet connectivity


Allows direct connection to an Ethernet communication network. Module with gateway function enables devices on an RS485 bus to communicate via Ethernet.

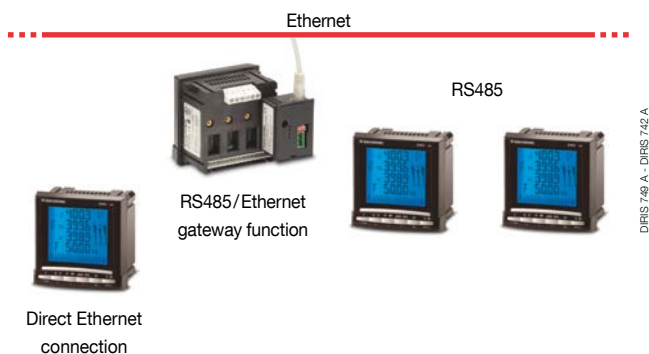

DIRIS 749 A - DIRIS 742 A

The embedded WEB server

The new Ethernet communication modules incorporate an embedded web server function, thereby enabling remote operation and configuration of a product without specific software. Access is via your Internet browser, simply by entering the IP address of the **DIRIS**.

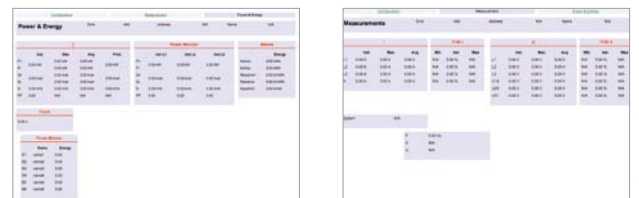

DIRIS 829 A - DIRIS 830 A

Expanded monitoring

The new temperature monitoring module:

- enhances energy diagnostics
- improves monitoring of facilities



PT 100-1 sensor
PT 100-2 sensor
PT 100- sensor
Internal T° measurement
PT 100-3 sensor

DIRIS 747 A

Dedicated supervision

- Centralising and display
- Creating load curves
- Performing measurement comparisons



DIRIS 507 A - DIRIS 513 A

The universal multi-function solution

The new **DIRIS A** Power Measurement Devices with extended functionality enabling you to:

- reduce operating costs,
- reduce production costs,
- optimise maintenance costs,
- improve the efficiency of your facility.



Metering

energy consumed by each building or manufacturing line, in order to distribute and optimise energy costs (multi-utility management)

Measuring

all electrical or analogue values (temperature, etc.) to verify that your facilities are working properly

Monitoring

your electrical networks via alarm management, secure monitoring of distribution parameters and remote control of electrical apparatus


Analysing

energy quality via detailed breakdown of harmonics and identification of troughs, outages, overvoltages and overcurrents on the electrical network

Communicating

all available information via a network tailored to your facility:

- > ETHERNET (Modbus TCP, Jbus/Modbus RTU over TCP)
- > RS485 (Jbus/Modbus, Profibus DP)

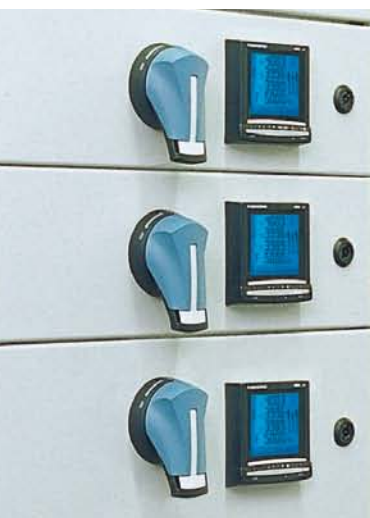

Selection guide

	DIRIS A10	DIRIS A20	DIRIS A40/A41	DIRIS A60
REQUIREMENTS				
Feeder measurement & control	•	•	•	•
Energy breakdown & allocation	•	•	•	•
Load analysis & management			•	•
Event monitoring			•	•
Detection & storage of network perturbations				•
Form factor	4 modules	panel mounted 96x96	panel mounted 96x96	panel mounted 96x96

Functions

	DIRIS A10	DIRIS A20	DIRIS A40/A41	DIRIS A60
MEASUREMENT				
Currents, voltages, frequency, active, reactive and apparent power, power factor	•	•	•	•
Predictive power			•	•
Voltage/current unbalance; Tangent φ				•
Temperature(s)	•		1...4 option	1...4 option
Average currents, voltages and frequency			•	•
Average power			•	•
ENERGY MANAGEMENT				
Energy meters (cl. 0.5S IEC 62053-22; cl. 2 IEC 62053-22)	•	•	•	•
Pulse meter	1*		2...6 option	2...6 option
Load curves			•	•
QUALITY ANALYSIS AND EVENT DETECTION				
THD 3U, 3V, 3I/in	level 51	level 51	level 63	level 63
Individual harmonics 3V, 3U, 3I/in (level 63)			•	•
Sag, swell and outages, overcurrent				•
RMS 1/2 period curve backup				•
Alarm output	1*	1* option	2...6 option	2...6 option
MEASUREMENT AND EVENT HISTORY				
Load curves			in option	•
Events & Alarms			-/•	•/•
Maximum average power	kW	kW	•	•
Maximum average currents	•	•	•	•

* 1 configurable

References

> DIRIS A10

DIRIS A10	4825 0010
DIRIS A10 with RS485 Jbus/Modbus communication	4825 0011

> DIRIS A20

DIRIS A20 110 to 400 V AC and 120 to 350 V DC supply	4825 0200
Module 1 output	4825 0080
RS485 JBUS/MODBUS communication module	4825 0082

> DIRIS A40/A41

DIRIS A40 110 to 400 V AC and 120 to 350 V DC supply	4825 0201
DIRIS A40 12 to 48 V DC supply	4825 1201
DIRIS A41 110 to 400 VAC and 120 to 350 VDC supply	4825 0202
DIRIS A41 12 to 48 VDC supply	4825 1202

> DIRIS A60

DIRIS A60 110 to 400 V AC and 120 to 350 V DC supply	4825 0207
--	-----------

> Module option: DIRIS A40/A41/A60

Pulse outputs module	4825 0090
RS485 JBUS/MODBUS communication module	4825 0092
RS485 PROFIBUS-DP communication module	4825 0205
Ethernet Module	4825 0203
Ethernet module with RS485 gateway	4825 0204
Temperature module	4825 0206
Analogue outputs module	4825 0093
Monitoring or control/command module	4825 0094
Memory module (DIRIS A40/A41)	4825 0097
Functional earth module	4825 0087

Associated current transformers

	Primary wound CT		Through cable CT		Three phase		Bar or cable-through CT								Split-core CT			
	TRB 70	T2RB 115	TCA 21	T2CA 225	TCB3 18-20	TCB3 22-30	TCB 17-20	TCB 26-30	TCB 28-30	TCB 32-40	TCB 44-63	TCB 85-100	TCB 100-125		TO 23	TO 58	TO 812	TO 816
Accuracy	0,5		0,5-1		1	1	1	0,5-1	0,5-1	0,5-1	0,5-1	0,5-1	0,5	0,5	0,5-1	0,5	0,5	0,5
0,2s version		•		•				•		•		•						
H (mm)	88,5	115	65	78,5	115	150	65	78,5	70	88,5	101,5	108,5	187,5	187,5	106	152	198	246
W (mm)	71	100	45	61	65	75	49,5	61	49,9	71	86	96	172	172	93	125	155	195
D (mm)	45	70	30	35	37	37	50	48	68	58	58	58	52	52	58	58	58	79
cable d (mm)			21	22,5	18	22	17,5	26	28	32	44	44	85	100	20	50	80	80
bar x 1 (mm)					20x5	30x10	20x5	30x10	30x10	40x10	50x12	63x10		123x30	20x30	50x80	80x120	80x160
bar x 2 (mm)								20x10		30x5	40x10	50x10	100x10					
bar x 3 (mm)													80x10	100x10				
Primary (A)	5 ... 40	25 ... 150	50 ... 300	150 ... 600	100 ... 250	250 ... 600	60 ... 400	50 ... 750	50 ... 600	50 ... 1000	100 ... 1250	200 ... 1600	750 ... 3000	1000 ... 4000	100 ... 400	250 ... 1000	250 ... 1500	1000 ... 5000
Secondary (A)	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Others types of transformers in our catalogue.

Socomec *worldwide*

IN EUROPE

BELGIUM

SOCOMECH BELGIUM

B - 1190 Brussel

Tel. +32 (0)2 340 02 30 - Fax +32 (0)2 346 28 99

info.scp.be@socomec.com

FRANCE

SOCOMECH

F - 94132 Fontenay-sous-Bois Cedex

Tel. +33 (0)1 45 14 63 30 - Fax +33 (0)1 45 14 63 38

info.scp.fr@socomec.com

GERMANY

SOCOMECH GmbH

D - 76275 Ettlingen

Tel. +49 (0)7243 65 29 2 0 - Fax +49 (0)7243 65 29 2 13

info.scp.de@socomec.com

ITALY

SOCOMECH Elettrotecnica s.r.l.

I - 20098 San Giuliano Milanese (MI)

Tel. +39 02 9849821 - Fax +39 02 98243310

info.scp.it@socomec.com

SPAIN

SOCOMECH ELECTRO, S.L.

E - 08310 Argentona (Barcelona)

Tel. +34 93 741 60 67 - Fax. +34 93 757 49 52

info.scp.es@socomec.com

THE NETHERLANDS

SOCOMECH B.V.

NL - 3991 CD Houten

Tel. +31 (0)30 760 0901 - Fax +31 (0)30 637 2166

info.scp.nl@socomec.com

THE UNITED KINGDOM

SOCOMECH Ltd

Hitchin Hertfordshire SG4 0TY

Tel. +44 (0)1462 440033 - Fax +44 (0)1462 431143

info.scp.uk@socomec.com

IN ASIA

NORTH EAST ASIA

SOCOMECH CHINA Co. Ltd

P.R.C 200052 Shanghai - China

Tel. +86 (0)21 5298 9555 - Fax +86 (0)21 6228 3468

info.scp.cn@socomec.com

SOUTH EAST ASIA & PACIFIC

SOCOMECH SWITCHING AND PROTECTION

UBI TECHPARK - 408569 Singapore

Tel. +65 65 07 94 90 - Fax +65 65 47 86 93

info.scp.sg@socomec.com

SOUTH ASIA

SOCOMECH INDIA

122001 Gurgaon, Haryana - India

Tel. +91 124 4562 700 - Fax +91 124 4562 738

info.scp.in@socomec.com

IN MIDDLE EAST

UNITED ARAB EMIRATES

SOCOMECH Middle East

Dubai, U.A.E.

Tel. +971 (0) 4 29 98 441 - Fax +971 (0)4 29 98 449

info.scp.ae@socomec.com

IN NORTH AMERICA

USA, CANADA & MEXICO

SOCOMECH Inc

Cambridge, MA 02142 USA

Tel. +1 617 245 0447 - Fax +1 617 245 0437

info.scp.us@socomec.com

HEAD OFFICE

SOCOMECH GROUP

S.A. SOCOMECH capital 11 149 200 €

R.C.S. Strasbourg B 548 500 149

B.P. 60010 - 1, rue de Westhouse

F-67235 Benfeld Cedex - FRANCE

INTERNATIONAL SALES DEPARTMENT

SOCOMECH

1, rue de Westhouse - B.P. 60010

F - 67235 Benfeld Cedex - FRANCE

Tel. +33 (0)3 88 57 41 41 - Fax +33 (0)3 88 74 08 00

info.scp.isd@socomec.com

www.socomec.com

Non contractual document. © 2012, Socomech SA. All rights reserved.

